


C-250 (250 Watts) & C-500 (500 Watts)
SUBMERSIBLE UTILITY DE-ICER
INSTALLATION INSTRUCTIONS

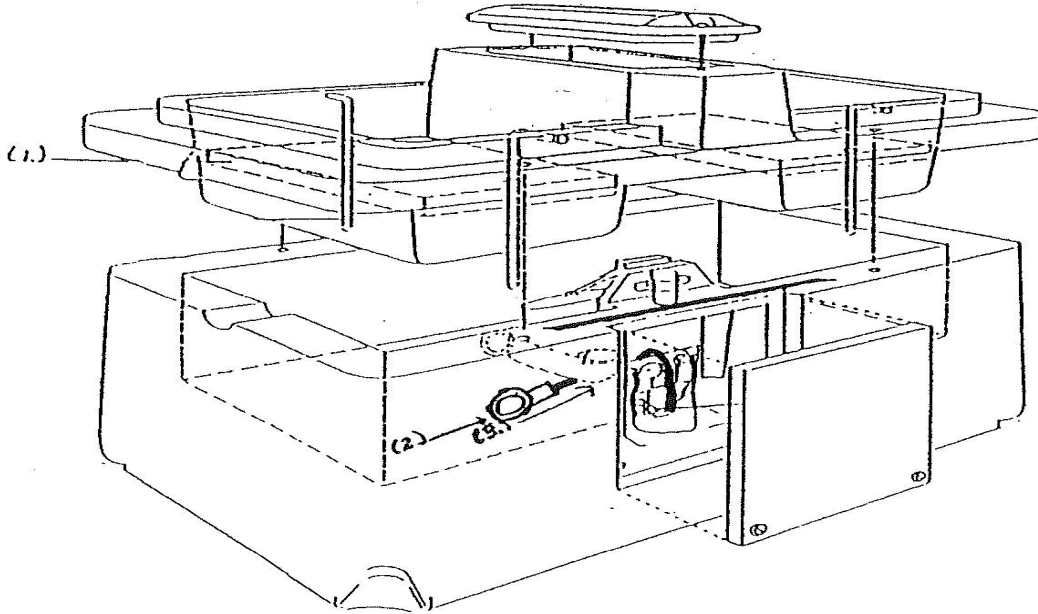

1. Insert heater below valve area in water. Make sure heater DOES NOT interfere with valve functions. This heater should be your only source of heat.
2. Run cord over the top next to valve in slot located for cord (make sure the cord DOES NOT stop valve functions).
3. Plug unit in. Unit has thermostat built in to control water temperature.
4. Unit should always be covered with water. If exposed without water, premature failure of the heater can occur.

*Make sure unit is properly grounded.

*Check unit for damage and clean unit off 1-2 times per year.

****** MUST BE INSTALLED BY A CERTIFIED ELECTRICIAN ******
****** IMPROPER USE CAN CAUSE ELECTRIC SHOCK ******

Heater Details: Cast Aluminum; Durable & Efficient; Thermostatically Controlled;
6 Foot Supply Cord; Safe In Plastic